

Sealing Equipment Products Co., Inc.



Visit our web site at www.sepcoUSA.com


Telephone
1-205-403-7500
1-800-633-4770

Fax
1-205-403-7592
1-800-426-3533



THE PACKING WITH MEMORY

Agitators, Mixers, Worn Equipment

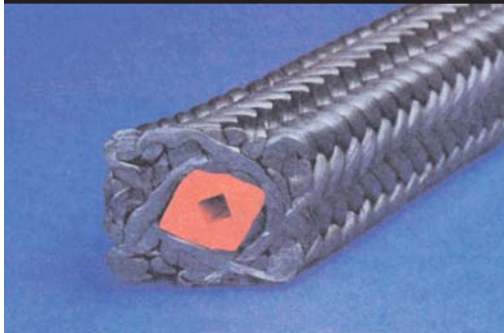

SEPCO Hollow Core Packings are specifically designed to reduce packing wear in rotating equipment with excessive shaft run out. Months of in-plant testing have proven that SEPCO Hollow Core Packings outlast conventional packing in applications associated with excessive shaft deflection on large shafts. We guarantee it! Hollow Core (1 1/2") has successfully run for 5 months in a hydropulper; replacing standard packings experiencing failure every 8 days. Hollow Core Style ML 4461 has run in a refiner in western Canada for 2 months, replacing standard aramid packings experiencing failure after 1 week and causing excessive shaft sleeve wear. Hollow Core packing has successfully run in a high density stock chest agitator, running over 1 year, replacing an expensive split seal.

Styles

ML 4461 Carlon Packing

Construction: Multi-Lok Braid

Features: SEPCO ML 4461 Carlon is a carbon filament packing treated with PTFE to help prevent color contamination and carbon migration.

Treatment: Each strand of the carbon yarn is treated and impregnated with a PTFE suspensoid, totally encapsulating the packing to prevent carbon filaments from migrating into the pumpage.

Equipment: Pulp mill equipment, steaming vessels, top separators, refiners, outlet devices, blow pumps, stock pumps, agitators and valves.

ML 2225 High Speed PTFE Packing

Construction: Multi-Lok Braid

Features: Acrylic yarns dipped in TFE suspensoid to insure a greater degree of chemical resistance and a lower coefficient of friction.

Recommended For: Caustics, mild acids difficult chemicals, air, gases, solvents, oils, and general chemical plant applications.

ML 4002 GFO Packing

Construction: Multi-Lok Braid

Features: Finely ground particles of the highest quality graphite in a PTFE matrix to control graphite migration.


Equipment: All reciprocating and rotating shafts.

Recommended For: All corrosive applications suitable for PTFE and graphite.

Applications

- | | |
|------------------------|---------------|
| -Refiners | -Steam Mixers |
| -Hydropulpers | -Washers |
| -Repulpers | -Deflakers |
| -Thick Stock Pumps | -Smelt Tank |
| -Stock Chest Agitators | Agitators |
| -Knife Gate Valves | |

**If for any reason you are not satisfied with the performance of SEPCO Hollow Core Packing, we will replace it with a SEPCO style equal to the packing taken out.*

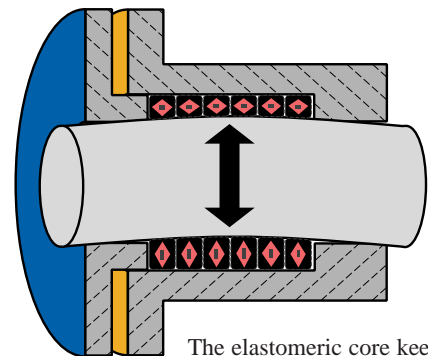

The elastomeric core keeps packing in constant contact with shaft and stuffing box.

Ref. HC1-12/99

Other Packing Styles Available Upon Request. May Require Minimum Poundage.

Certified to ISO 9002 Standards. Specialists in Quality Fluid Sealing Solutions.

Please Call Us Today for Pricing and Availability
123 Airpark Industrial Road; Alabaster, AL 35007