


Telephone
1-205-403-7500
1-800-633-4770

SEPCO Style ML8002

Fax
205-403-7545

Visit our web site at www.sepcoUSA.com

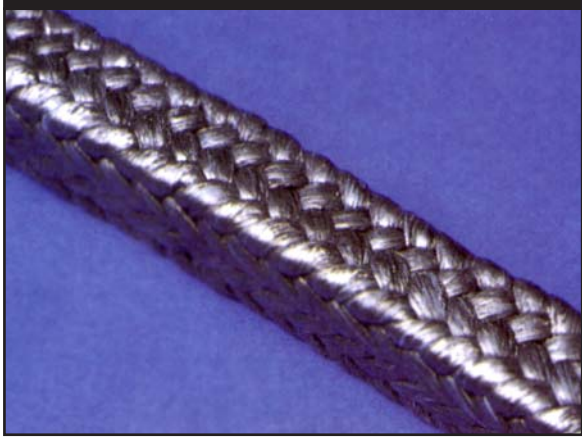

High Speed Packing

- Construction:** Multi-Lok Braid
- Features:** PTFE fibers specially treated with finely ground particles of graphite to increase thermal conductivity and reduce thermal expansion resulting in higher shaft speeds.
- Treatment:** Lubricated with a proprietary high speed lubricant.
- Equipment:** All reciprocating and rotating shafts.
- Recommended For:** All reciprocating and rotating shafts.
- Limitations:** Shaft speeds to 4900 FPM; temperatures to 550°F / 287°C
pH range 0 - 14.

Certified to ISO 9001: 2000 Standards.

Please Call Us Today for Pricing and Availability
123 Airpark Industrial Road; Alabaster, AL 35007