


SEPCO® Style ML2225

Telephone
1-205-403-7500
1-800-633-4770

Fax
1-205-403-7592
1-800-426-3533

Visit our web site at www.sepcoUSA.com

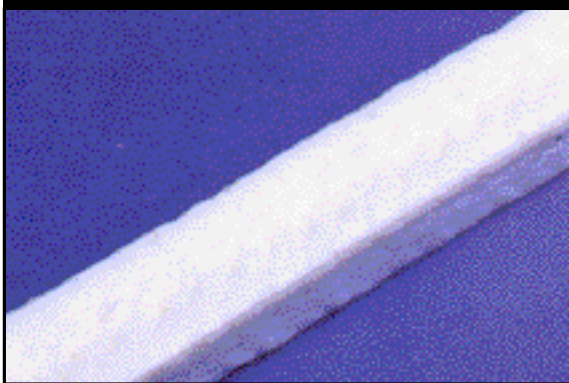

ML2225 General Service PTFE/Synthetic Packing

An excellent general service packing for use on rotary pumps, reciprocating pumps, agitators and other rotating equipment.

Features:

Yarns are coated in PTFE suspensoid. This system of impregnation assures even distribution of the PTFE particles, protecting the fibers from chemical action.

Surface Treatment:

A surface coating of PTFE is applied after braiding. To assure good break-in characteristics, a special high temperature synthetic lubricant is added.

Recommended For:

Brine, caustics, mild acids, difficult chemicals, air, gases, solvents, oils, general chemical plant applications.

Limitations:

Shaft speeds to 1850 fpm; temperatures to 500°F/ 260°C, pH 3-11.

Certified to ISO 9001: 2000 Standards. Quality Fluid Sealing Solutions for Industry.

Please Call Us Today for Pricing and Availability
123 Airpark Industrial Road, Alabaster, AL 35007