


## ML4461

Telephone  
1-205-403-7500  
1-800-633-4770

Fax  
1-205-403-7592  
1-800-426-3533

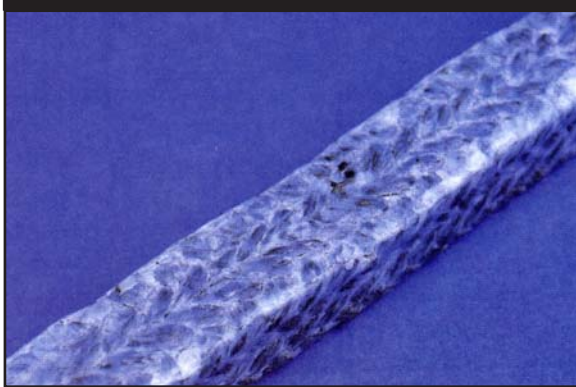

## ML 4461 Carlon Packing

**Construction:**

Multi-Lok Braid

**Features:**

SEPCO ML4461 is a carbon filament packing treated with PTFE to help prevent color contamination and carbon migration.

**Treatment:**

Each strand of the carbon yarn is treated and impregnated with a PTFE suspensoid, totally encapsulating the packing to prevent carbon filaments migrating into the pumpage.

**Equipment:**

Pulp mill equipment, steaming vessels, top separators, refiners, outlet devices, blow pumps, agitators and valves.

**Recommended For:**

Most chemical services, except strong oxidizers.

**Limitations:**

Shaft speeds to 3000 FPM; temperatures to 600°F / 345°C, pH range 0-14.

**Certified to ISO 9001: 2000 Standards.**

**Please Call Us Today for Pricing and Availability**  
123 Airpark Industrial Road; Alabaster, AL 35007